

# Heracleum III Linear

BERTJAN POT | POWERED THROUGH ELECTROSANDWICH® BY MARCEL WANDERS



Don't confuse the new Heracleum III Linear with its Endless sibling. Look closely and you'll see blossoms gently sweeping upwards at either side, making the Heracleum III Linear perfect to hang above long surfaces, like your dining table or kitchen island. Like the other designs in the Heracleum family, the lean branches are powered by Electrosandwich, by Marcel Wanders studio. The Heracleum III Linear, available in four colours, is inspired by the flowering plant of the same name. Its bloom frozen in time. This most recent design in the Heracleum family is compatible with our Wireless Wall Switch and contains bright LEDs; together they offer a higher light output that creates a warm glow.

---


## *Detailing*




The Heracleum III Linear is a design not possible with normal wires. It's powered by Electrosandwich, a technique of coating conductive layers.

---

## *Colours*




Green



Nickel



Copper




White

---

# Heracleum III Linear / Linear

## Dimensions

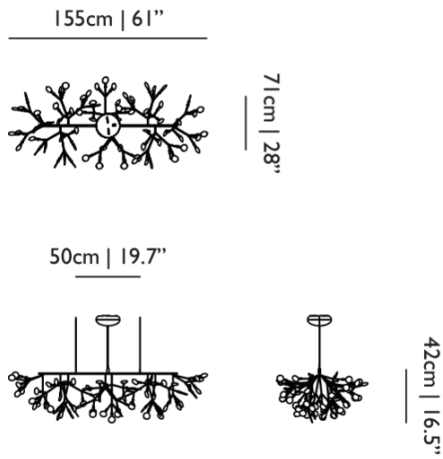

## Product

**WIDTH** 155cm | 61"  
**HEIGHT** 42cm | 16.5"  
**DEPTH** 71cm | 28"  
**WEIGHT NETTO** 2.2kg | 4.85lbs

## Packaging

**WIDTH** 85cm | 33.5"  
**HEIGHT** 55cm | 21.7"  
**CUBAGE** 0.92m<sup>3</sup> | 32.36ft<sup>3</sup>  
**LENGTH** 196cm | 77.2"  
**WEIGHT** 13kg | 28.66lbs

---

## Technical CCC

### MATERIAL

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

72

### INPUT VOLTAGE

120-250

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

22W

### LAMPHOLDER

LED (Solid state)

### LIFETIME

50000 hours

### CABLE COLOUR

Transparent with tinned cores

### CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

### CANOPY

Pebble III in matching color

### CHROM X

0.46

### CHROM Y

0.4

### COLOUR TEMPERATURE

2600 K

### CRI

91

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

1872 lm

### DIMMING & LIGHTING CONTROL

DALI dt6, Push / Pulse dim on Line Voltage, Wireless Wall Switch

*See last page for more information about the dimming possibilities.*



---

*Technical CE / cULus*

**MATERIAL**

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

**LIGHTSOURCE TYPE**

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

72

**INPUT VOLTAGE**

120-250

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

22W

**LAMPHOLDER**

LED (Solid state)

**LIFETIME**

50000 hours

**CABLE COLOUR**

Transparent with tinned cores

**CABLE LENGTH**

400cm | 157.5"; 1000cm | 393.7"

**CANOPY**

Pebble III in matching color

**CHROM X**

0.46

**CHROM Y**

0.4

**COLOUR TEMPERATURE**

2600 K

**CRI**

91

**LIGHT DIRECTION**

All directions

**LIGHT OUTPUT**

1872 lm

**DIMMING & LIGHTING CONTROL**

DALI dt6, Push / Pulse dim on Line Voltage, Wireless Wall Switch, Mains / ELV dimming is not possible

*See last page for more information about the dimming possibilities.*



## *Dimming & Lighting Control*

### *DALI dt6*

The luminaire is dimmable by integrating it into a DALI network. This is an universal and professional standard in home automation systems with endless control possibilities and ease. We advise to hire a professional to integrate the luminaire into your DALI network.

Compatible models: Linear CCC, Linear CE, Linear cULus

---

### *Push / Pulse dim on Line Voltage*

The luminaire is dimmable by using an external momentary switch or pushbutton switch. The switch is usually mounted on an existing wall socket. In some cases a Phase or Control wire needs to be added to your home's wiring. The switch should be suitable for use with line voltage and of the type 'normal off - momentary on'. The luminaire dims perfectly when the switch makes and holds contact. A short press switches between on and off.

Compatible models: Linear CCC, Linear CE, Linear cULus

---

### *Wireless Wall Switch*

With our Wireless Wall Switch, you'll have full control over your Moooi lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooi lighting design. The wall switch can be integrated in System 55 or Decora style wall switches. The Wireless Wall Switch communicates via Bluetooth with the radio device in the luminaires canopy. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: Linear CCC, Linear CE, Linear cULus

---

### *Mains / ELV dimming is not possible*

Mains and/or ELV dimming is not possible. The wireless wall switch is advised for dimming in this case.

Compatible models: Linear CE, Linear cULus

---