



# NX26



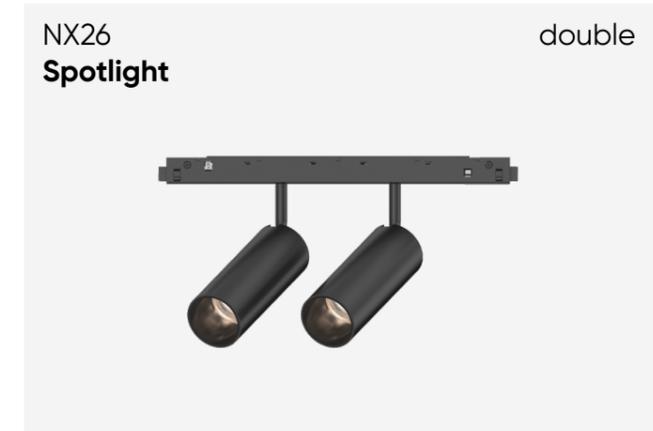

## NX26 Track

## Accessories



NX26-LC



NX26-SUS-TEK



NX26-PLEF01




NX26-EJC01




NX26-PRK

## NX26 Spotlight

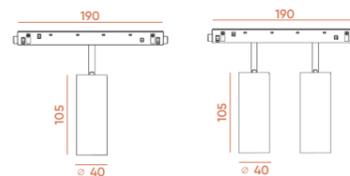

**Beam angle** 45°  
**Input Voltage** DC 48V  
**CRI** 90

**System W** **single** 12W **double** 24W  
**System LM** 600lm 1200lm  
**CCT** 3000K 3000K




### Code ordering

**NX26-RS40-24W-930-45-D-BK**

Product family	Type	Colour rendering index	Colour temperature	Beam angle	Control gear	Surfaced finish
<b>NX26</b> NX26	<b>RS40 - 12W</b> Spotlight <b>RS40 - 24W</b> Double Sp.	<b>9</b> CRI>90	<b>30</b> 3000K	<b>45</b> 45°	<b>D</b> DALI	<b>BK</b> Black


## NX26 Evo

UGR<19



**Beam angle** 35°  
**Input Voltage** DC 48V  
**CRI** 90  
**System W** 13W

**System LM** 1100lm  
**CCT** 3000K



### Code ordering

**NX26-AL280-S12-13W-930-35-D-BK**

Product family	Type	Colour rendering index	Colour temperature	Beam angle	Control gear	Surfaced finish
<b>NX26</b> NX26	<b>AL280 - S12 - 13W</b> Evo	<b>9</b> CRI>90	<b>30</b> 3000K	<b>35</b> 35°	<b>D</b> DALI	<b>BK</b> Black


## NX26 Line

UGR<19



**Beam angle** 65°  
**Input Voltage** DC 48V  
**CRI** 90  
**System W** 13W

**System LM** 750lm  
**CCT** 3000K



### Code ordering

**NX26-CL560-13W-930-65-D-BK**

Product family	Type	Colour rendering index	Colour temperature	Beam angle	Control gear	Surfaced finish
<b>NX26</b> NX26	<b>CL560 - 13W</b> Line	<b>9</b> CRI>90	<b>30</b> 3000K	<b>65</b> 65°	<b>D</b> DALI	<b>BK</b> Black



**THE LIGHT**  
 lighting design & consulting

The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.